


Mounting and Installing

Commission (link) the switch to the compatible system before mounting.

Mount the ILLUMRA wireless switch on a convenient surface with screws or double-sided adhesive tape. The unit disassembles to ease attachment with screws. NOTE: Installation on metal surfaces or near metal objects will reduce the effective radio range. For best performance, avoid mounting near large metal objects.

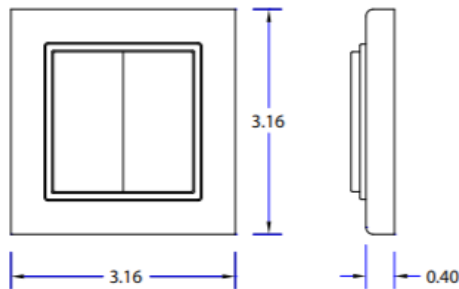

For flush mount, mount the switch without the backplate into either a standard electrical switch box or a low voltage mounting bracket using included screws.

Compatible With

1. Silvair
2. Casambi
3. Bubbynet
4. Other Bluetooth Lighting systems

Specifications

Part Number	BTT-S1Exx	BTT-S2Exx
Range	30ft (10m)	
Frequency	Bluetooth (2.4Ghz)	
Power	Self-generated when switch is pressed	
Buttons	2 Buttons	4 Buttons
Dimensions	3.16 (W) x 3.16 (H) x 0.40 (D) in 80.2 (W) x 80.2 (H) x 10 (D) mm	
Ordering Codes	BTT-S1EWH (White) BTT-S1EBK (Black)	BTT-S2EWH (White) BTT-S2EBK (Black)



BTT-S1Exx

Euro Style Self-Powered Wireless Light Switches

Commissioning

Follow instructions from the manufacturer of the lighting controller to be paired with the switch



Euro Style Self-Powered
Wireless Light Switches

Overview

The Euro Style Self-Powered Wireless Light Switch is a battery-free wireless transmitter that communicates with a wide variety of receivers. Every time either of the switches are pressed a small micro-generator produces a small electrical current that powers a built-in transmitter. This transmitter sends wireless signals that command the receiver to turn a device off or on. With an appropriate receiver, the switch can even be used to control the dimming of lights.