



## Wireless Switch

WH-white, LA-Light Almond, IV-Ivory, BK-Black, BR-Brown, GY-gray

### Included in the package:


- 1 - Dual or Single Rocker Wireless Switch
- 1 - Screwless faceplate
- 1 - Backplate for surface mounting
- 2 -  $\frac{3}{8}$ " Backplate attachment screws
- 2 -  $\frac{3}{4}$ " Junction box mounting screws
- 2 - Command Strips®
- 1 - Installation Guide

### Wireless Switch Features

- Powered by kinetic energy produced with the click of the button
- No battery or external power required
- Compatible receivers turn Lights ON and OFF without wire to the switch location
- Press and hold dimming when used with a compatible dimming receiver
- Control multiple receivers
- Link multiple switches to each receiver for 3-way function (depends on the receiver)
- Compatible with all decorator faceplates

### Specifications:

Range	30-60 feet, 10-20m (typical)
Frequency	Bluetooth (2.4Ghz)
Power	Self-generated when pressed
Buttons	2 buttons on Single Rocker 4 buttons on Dual Rocker
Functions	On/Off, Dimming, Multiple switches per sensor
Operating Temp	-13° to +150°F (-25° to 65°C)
Storage Temp	-13° to +150°F (-25° to 65°C)
Dimensions	2.75 (W) x 4.5 (H) x 0.62 (D) In 7.0 x 11.4 x 1.6cm
Radio Certification	FCC, IC, and CE

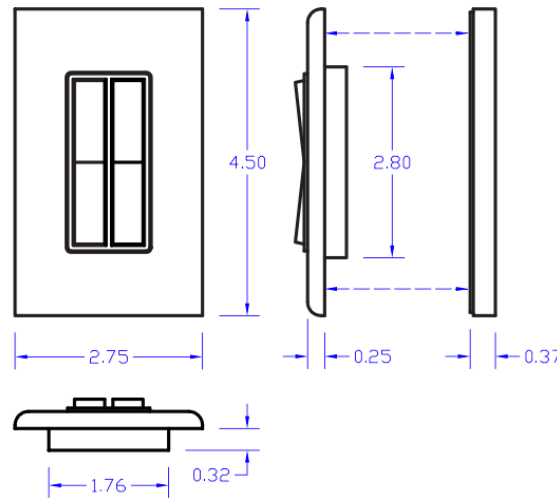


### Mounting

Always follow local electrical codes when installing this device. Consult an electrician if unsure about any of these instructions.

The wireless light switch is compatible with standard decorator style single or multi-gang faceplates. A single gang faceplate is included.

**Option A:** Surface mount backplate to a flat surface using included Command Strips or with screws (not included). If using Command Strips, make pull tabs accessible through the center of the backplate. After the backplate is mounted, attach switch to backplate using included  $\frac{3}{8}$ " backplate attachment screws. Snap on screwless faceplate.

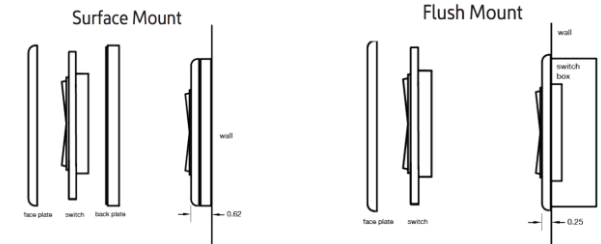

**Option B:** Flush mount on a standard electrical switch box using included  $\frac{3}{4}$ " junction box mounting screws. Cover with any faceplate that has a decorator size opening.

### Commissioning instructions

1. Use the Enlighted app to access linking instructions
2. Follow instructions in the app to link the switch

Contains FCC ID: SZV-PTM215U

Contains IC: 5713A-PTM215U

The enclosed device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (i.) this device may not cause harmful interference and (ii.) this device must accept any interference received, including interference that may cause undesired operation.